


## DXW-PF Self-heating Cable

### Structure

1. Copper conduct: 7x0.42
2. Conducting plastic layer: flame resistant PTC
3. Insulation: refined polyolefins
4. Braiding: Al Mg alloy wire
5. Jacket: F plastic

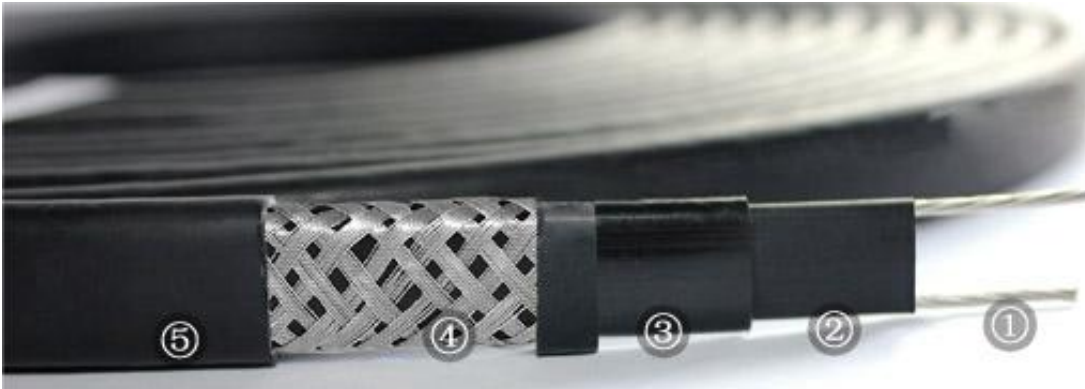

### Specifications

1. Color: Black
2. Temperature: Max. work temp.  $65 \pm 5^{\circ}\text{C}$ ; Max. exposure Temp.  $85^{\circ}\text{C}$
3. Construction Temp. Min.  $-40^{\circ}\text{C}$
4. Insulation resistant: length 100m,  $75^{\circ}\text{C}$ , testing Min.  $20 \text{ M}\Omega$ ,

